


MOBOTIX D15 2x 6MP DualDome Camera



Technical specifications subject to change without notice

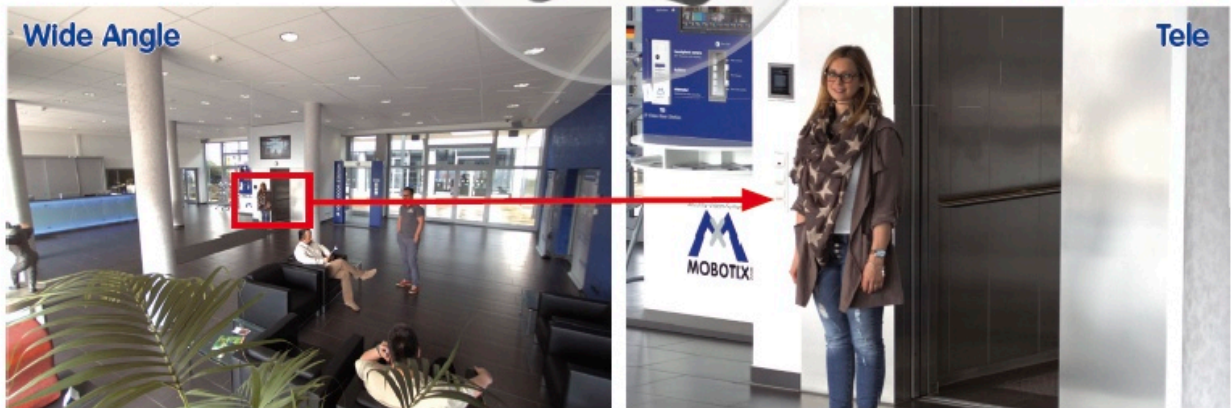

Adjustable lens modules can capture two different areas simultaneously.

Versatile. Twice as Vigilant.

The D15 is a dual-sensor dome camera with two lens modules providing a wide range of fully adjustable viewing options for a huge variety of applications. The D15 is completely modular and can be setup as standard DualDome, as 180° model with super-wide panorama field of view or as day-night version.

Specs may change without notice. For more information on the entire range of MOBOTIX products, such as prices, manuals, video management software for computers and iOS devices, etc., please go to mobotix.com, or contact our Australian Distributor, **Suretek Pty Ltd** by phone (1300 65 44 33) or email (contact@suretek.com.au).



Adjustable lenses

Flexible Installation

The D15 is characterized by complete modularity. Choose from available lens carriers (pano, fix), lens units, all fully adjustable in any direction within the camera. This flexibility, combined with the dual-lens system, provides practically unlimited viewing options from one camera.



180°

Panoramic View


The D15 can be setup as 180° model with the panorama carrier and captures a super-wide view. D15 provides live and recorded images with a maximum resolution of 12 megapixels. PTZ and image settings can be easily tuned with the integrated camera features.



Fixed lenses

Day & Night Capture

The D15 body can be also equipped with a day&night carrier, which provides parallel alignment of two lenses for perfect same-view day and night video capture.



Two Cameras in One

Dual-lens system captures two different views simultaneously and requires only a single PoE cable connection.

Technical Data

Lens Options	B036 to B237, 180° version (panorama), DNight-FIX version with parallel Day/Night lenses	Min. Light Sensitivity	Day Sensor: 0.1 lux at 1/60 sec Night Sensor: 0.02 lux at 1/60 sec
Image Sensors	1/1.8" CMOS (6MP) Day (Color) or Night (B&W)	Sensor Resolution	6MP: 3072×2048 pixels (Color/B&W)
Max. Frame Rate (MxPEG)	MEGA/HD: 30 fps, QXGA: 15 fps, 6MP: 8 fps, 2x 6MP: 4 fps	Compression	MxPEG, M-JPEG, JPEG, H.264 (SIP video only)
DVR Recording	Internal: microSD Card External: PC/NAS	Audio	Integrated microphone & speaker, VoIP, intercom, sound recording
Operating Conditions	IP65/54 (with/without wall mount), IK10, IP66/IK10+ (with Vandalism Kit), -30 to +60 °C	Internal Sensors	Temperature, PIR, microphone illumination, shock detector
Image Processing	MxActivitySensor, VMD, image correction, backlight	Software (free of charge)	MxManagementCenter, MOBOTIX App



D15 – Technical Specifications

Security-Vision-Systems **MOBOTIX**

Camera Variants	D15 Day	D15 Night	D15 180° Day	D15 180° Night	D15 DNight-Fix
Specialties	Modular system: D15 Body MX-D15Di-Sec with 1 or 2 lens units of choice (self-assembly)		Complete Sets: D15 models with factory-fitted lens units		
Lenses, Sensors					
Lens unit with Ultra Wide Lens B036 (103° x 77°), night version optionally with long-pass filter (LPF)	MX-D15-Module-D20-6MP-F1.8	MX-D15-Module-N20-(LPF-)6MP-F1.8	–	–	MX-D15Di-Sec-DNight-D20N20-FIX-6MP-F1.8
Lens unit with Super Wide Lens B041 (90° x 67°), night version optionally with long-pass filter (LPF)	MX-D15-Module-D22-6MP-F1.8	MX-D15-Module-N22-(LPF-)6MP-F1.8	MX-D15Di-Sec-180-6MP-F1.8	MX-D15Di-Sec-Night-180-6MP-F1.8	MX-D15Di-Sec-DNight-D22N22-FIX-6MP-F1.8
Lens unit with Wide Lens B061 (60° x 45°), night version optionally with long-pass filter (LPF)	MX-D15-Module-D32-6MP-F1.8	MX-D15-Module-N32-(LPF-)6MP-F1.8	–	–	MX-D15Di-Sec-DNight-D32N32-FIX-6MP-F1.8
Lens unit with Standard Lens B079 (45° x 34°), night version optionally with long-pass filter (LPF)	MX-D15-Module-D43-6MP-F1.8	MX-D15-Module-N43-(LPF-)6MP-F1.8	–	–	MX-D15Di-Sec-DNight-D43N43-FIX-6MP-F1.8
Lens unit with Tele Lens B119 (31° x 23°), night version optionally with long-pass filter (LPF)	MX-D15-Module-D65-6MP-F1.8	MX-D15-Module-N65-(LPF-)6MP-F1.8	–	–	MX-D15Di-Sec-DNight-D65N65-FIX-6MP-F1.8
Lens unit with Distant Tele Lens B237 (15° x 11°), night version optionally with long-pass filter (LPF)	MX-D15-Module-D135-6MP-F1.8	MX-D15-Module-N135-(LPF-)6MP-F1.8	–	–	MX-D15Di-Sec-DNight-D135N135-FIX-6MP-F1.8
Image sensor with individual exposure zones	Color	B/W	Color	B/W	Color + B/W
Sensor sensitivity in lux at 1/60 s /1 s	0,1/0,005	0,02/0,001	0,1/0,005	0,02/0,001	0,1/0,005 (Color) 0,02/0,001 (B/W)
Image sensor resolution (color or B/W sensor)	6MP (3072 x 2048)				

Hardware Functions					
Protection class with no accessories/Outdoor Wall Mount/Vandalism Set	IP54/IP65/IP66 and IK10/IK10/IK10+				
Ambient temperature (range)	-30 to 60°C/-22 to 140°F				
Temporary internal DVR	64 MB				
Internal DVR, ex works	4 GB (microSD)				
Microphone/speaker	•/•				
Passive infrared sensor (PIR)	•				
Camera optics with Long-Pass Filter (LPF)	–	• (optional)	–	–	–
Integrated temperature sensor	•				
Shock detector	•				
Power consumption (typical)	< 7 watts				
Variable PoE class (factory default: 3)	2 or 3				
Interfaces Ethernet/MxBus/USB	•/•/•				
Interfaces IO and RS232	With accessory (MX-232-IO-Box)				

Image Formats, Frame Rates, Image Storage				
Maximum image format (dual image from both sensors)	2x 6MP (6144 x 2048) 2x 6MP			
Maximum frame rate (MxPEG, max. resolution)	8 fps (6MP), 4 fps (2x 6MP)	4 fps (2x 6MP)	8 fps (6MP) 4 fps (2x 6MP)	
CIF images with 4 GB MicroSD DVR	250,000			



D15 – Technical Specifications

Security-Vision-Systems



Image Formats, Frame Rates, Image Storage	
VGA images with 4 GB MicroSD DVR	125,000
HD images with 4 GB MicroSD DVR	40,000
QXGA images with 4 GB MicroSD DVR	20,000

Camera Variants	D15 Day	D15 Night	D15 180° Day	D15 180° Night	D15 DNight-Fix
General Functions					
Digital zoom (continuous) with panning	•	•	•	•	•
Codecs: Motion-JPEG/MxPEG/H.264 for SIP	•/•/•	•/•/•	•/•/•	•/•/•	•/•/•
Programmable exposure zones	•	•	•	•	•
Snapshot recording (pre/post-alarm images)	50	50	50	50	50
Terabyte ring buffer storage (internal/network)	•	•	•	•	•
Continuous recording with sound (0.2 to 30 fps)	•	•	•	•	•
Event recording with sound	•	•	•	•	•
Time and event control/flexible event logic	•/•	•/•	•/•	•/•	•/•
Weekly schedules/holidays	•	•	•	•	•
Web functionality (FTP, email)	•	•	•	•	•
Playback/QuadView and MultiView	•/•	•/•	•/•	•/•	•/•
Bidirectional sound in browser	•	•	•	•	•
Logo generator, animated	•	•	•	•	•
Master/Slave arming	•	•	•	•	•
Several scheduled privacy zones	•	•	•	•	•
Customized voice messages	•	•	•	•	•
VoIP telephony (audio/video, alert)	•	•	•	•	•
Remote alarm notification (network message)	•	•	•	•	•
Signal inputs/outputs and RS232 via MxBus module	•	•	•	•	•
Programming interface (HTTP API)	•	•	•	•	•
Security Features (HTTPS/SL, IP-based access control, IEEE 802.1X network authentication)	•	•	•	•	•

Video Analysis					
Video motion detector	•	•	•	•	•
MxAnalytics	–	–	–	–	–
MxActivitySensor	•	•	•	•	•

Video Management Software					
MxManagementCenter	•	•	•	•	•
MOBOTIX App (iOS)	•	•	•	•	•


- available ex works
- not available

Delivered Parts D15




(Excerpt from the technical documentation: www.mobotix.com > Support > Manuals)


Side

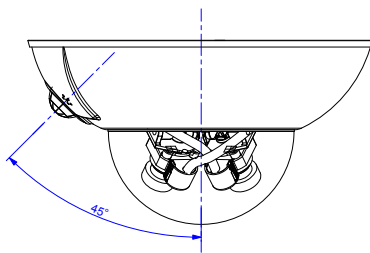



Front

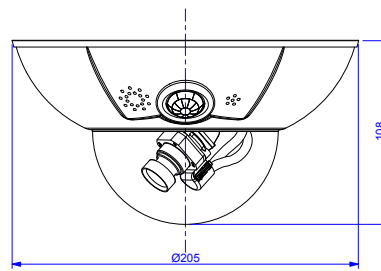

Bottom

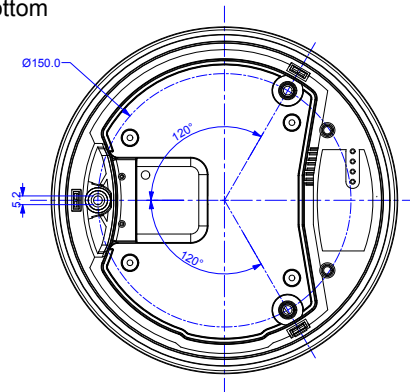

(Excerpt from technical drawings and 3D views: www.mobotix.com > Support > Image Database)

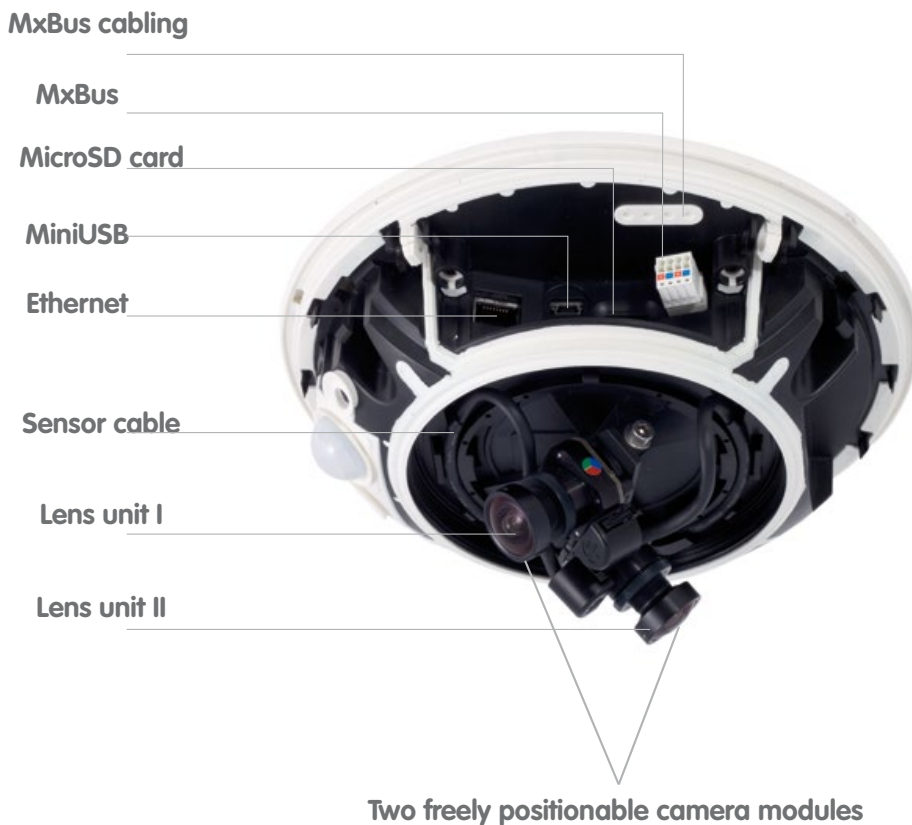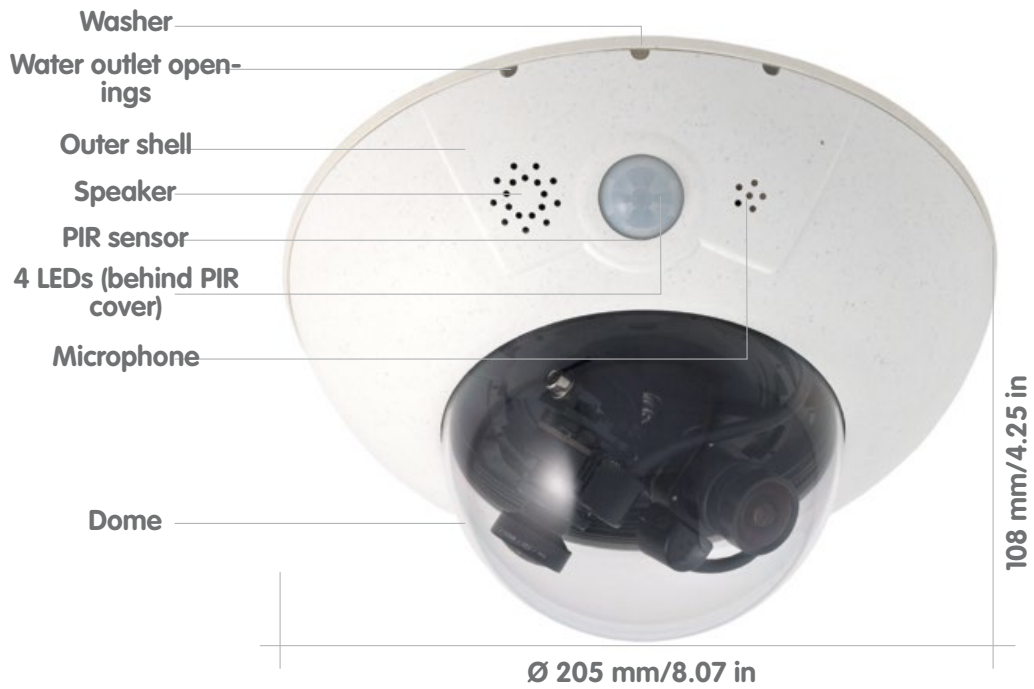

(D15 – Camera housing and connectors, excerpt from the technical documentation)